



# INDUSTRIAL PLUG


Enerlites®




67351  
50AMP 125/250V  
3-Pole 3-Wire  
NEMA 10-50P




65351  
50AMP 125/250V  
2-Pole 3-Wire  
Grounding  
NEMA 6-50P




66351  
50AMP 125/250V  
3-Pole 4-Wire  
Grounding  
NEMA 14-50P



67352  
30AMP 125/250V  
3-Pole 3-Wire  
NEMA 10-30P



65352  
30AMP 125/250V  
2-Pole 3-Wire  
Grounding  
NEMA 6-30P




66352  
30AMP 125/250V  
3-Pole 4-Wire  
Grounding  
NEMA 14-30P

## Installation


- WARNING:** TO AVOID FIRE, SHOCK, OR DEATH, UNPLUG CORD OR TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT POWER IS OFF BEFORE WIRING!
- The provided interchangeable blade enable the plug to be converted between 30amp type and 50amp type.
- Prepare Cord: Strip cord jacket according to STRIPPING DIAGRAM (P1)
- Connect Wires: Twist all strands of each conductor tightly together and insert into proper terminal. Hold each conductor in terminal housing, tighten each terminal screw to 1.6 N.M(≈14.2 in. lbs) of Max torque, firmly over conductor.
- 14-50P as an example: Connect the green wire to the U-shaped blade. Connect the white wire to the straight blade opposite the U-shaped blade, connect the other 2 wires to the remaining 2 blades. Make sure the blade wire clamps face toward to the outside and wiring position is correct (P2). please refer to the Wire Diagram below for wiring details.
- Install the cord clamp and tighten the screws.
- Put the cover back to the plug, tighten the surface mounting screws.

【Cord Range: #10/3 SRD to #4/3 SRD, 8.in.dia.max】


## Wire Diagram

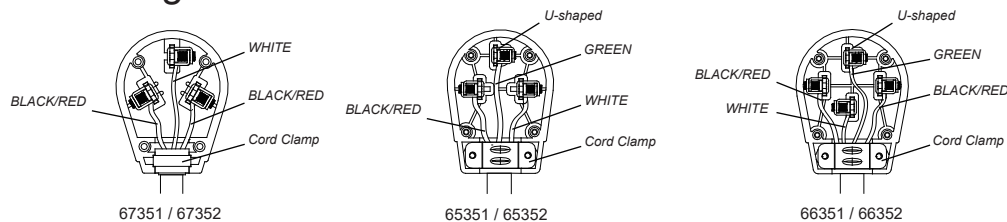

Wire Strip Length = 5/8"



(P1)




(P2)


© 2020 Enerlites Inc. CA, U.S.A.  
WWW.ENERLITES.COM  
0209300160

# INDUSTRIAL PLUG


Enerlites®




67351  
50AMP 125/250V  
3-Pole 3-Wire  
NEMA 10-50P




65351  
50AMP 125/250V  
2-Pole 3-Wire  
Grounding  
NEMA 6-50P




66351  
50AMP 125/250V  
3-Pole 4-Wire  
Grounding  
NEMA 14-50P



67352  
30AMP 125/250V  
3-Pole 3-Wire  
NEMA 10-30P



65352  
30AMP 125/250V  
2-Pole 3-Wire  
Grounding  
NEMA 6-30P




66352  
30AMP 125/250V  
3-Pole 4-Wire  
Grounding  
NEMA 14-30P


## Installation

- WARNING:** TO AVOID FIRE, SHOCK, OR DEATH, UNPLUG CORD OR TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT POWER IS OFF BEFORE WIRING!
- The provided interchangeable blade enable the plug to be converted between 30amp type and 50amp type.
- Prepare Cord: Strip cord jacket according to STRIPPING DIAGRAM (P1)
- Connect Wires: Twist all strands of each conductor tightly together and insert into proper terminal. Hold each conductor in terminal housing, tighten each terminal screw to 1.6 N.M(≈14.2 in. lbs) of Max torque, firmly over conductor.
- 14-50P as an example: Connect the green wire to the U-shaped blade. Connect the white wire to the straight blade opposite the U-shaped blade, connect the other 2 wires to the remaining 2 blades. Make sure the blade wire clamps face toward to the outside and wiring position is correct (P2). please refer to the Wire Diagram below for wiring details.
- Install the cord clamp and tighten the screws.
- Put the cover back to the plug, tighten the surface mounting screws.


## Wire Diagram

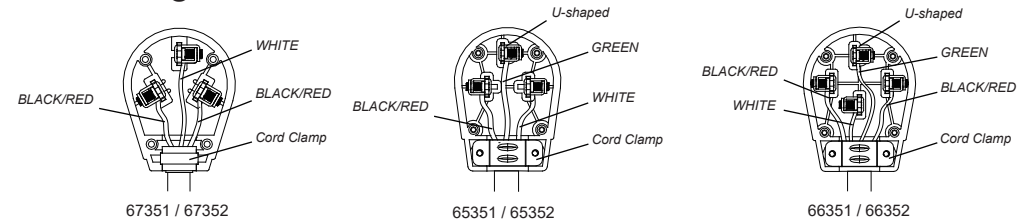

Wire Strip Length = 5/8"



(P1)



(P2)

© 2020 Enerlites Inc. CA, U.S.A.  
WWW.ENERLITES.COM  
0209300160