


INSTALLATION INSTRUCTIONS

61501-1A1C-PD60

60W Type-C GaN Technology and High Speed Type-A In-Wall USB Charger with Tamper-Resistant Receptacles.



SPECIFICATIONS

Receptacle rating.....	15 Amp, 125VAC, 60Hz
Output for USB A Port.....	2.4A @ 5V
Output for USB C Port Non-PD	3A @ 5V
Output for USB C Port PD	2A - 3A @ 5V/9V/12V/15V/20V
Operating temperature.....	-4 to 140°F (-20 to 60°C)
Receptacle dimension	3-3/4"×2-1/4"×3-3/16"

DESCRIPTION

Enerlites 61501-1A1C-PD60 GaN in wall Charger meets the charging needs of multiple high-demand devices, like your MacBook Pro 16", iPad Pro (2018), and iPhone 13 series. With 60W USB-C power output, this power delivery fast charger can power the connected device at maximum speeds, freeing you from the need for an adapter and low battery anxiety.

FEATURES

- Great with GaN 60W Power Delivery (PD) 3.0 single port USB-C Charging power. This USB-C receptacle charger takes advantage of Power Delivery in this new era of fast charging, pumping out high wattage of up to 60W, significantly shortening charging time for larger PD-enabled devices like tablets, laptop computers and more.
- The all-in-one USB Charging Tamper-Resistant Receptacle includes 2 port: 1 USB-A port and 1 USB-C PD 3.0 port, which are tailored for multiple devices and provide fast charging at the same time. An excellent laptop charging solution without the need of an adapter.
- This USB receptacle delivers the fastest possible charging speed to USB-C and standard speed to USB-A powered devices, including MacBook Pro/Air, Galaxy S20/S10, Dell XPS 13, Note 20/10+, iPhone 12/Pro/Mini, iPad Pro, Pixel, and More.
- Use a USB-C to Lightning cable for Lightning devices and use a USB-C to USB-C cable for USB-C devices (cables not included)
- This device is not a portable charger or power bank; it must be connected to a wall outlet to use.

WARNING

Turn the POWER OFF at the circuit breaker before installing the receptacle.


Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.

This USB receptacle CANNOT be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

WIRING DIRECTIONS

1. Turn off power at circuit breaker.
2. Identify the HOT, NEUTRAL, and GROUND wires in the wall box.
3. Insert wires into the terminal holes on the back side of the receptacle, then tighten the terminal screws to clamp wires in place.

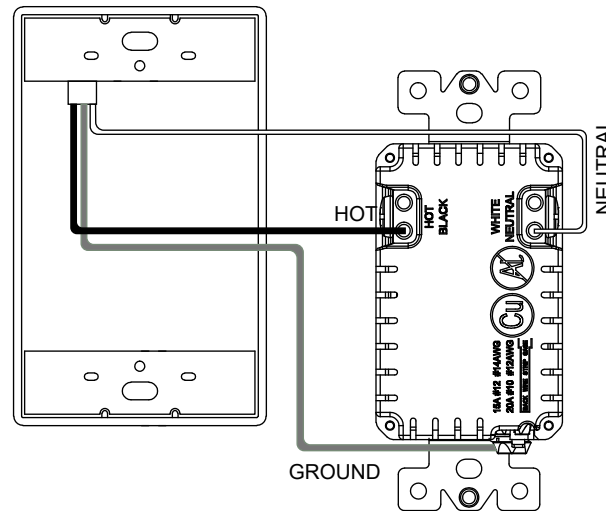

COMPATIBILITY

60W Type-C Power Delivery with PPS

You can now safely charge or power your electronics with up to 60 watts Programmable Power Supply (PPS).


USB Type-C Power Delivery provides cooler, faster, and a broader range of charging. It is compatible with a wide range of electronic devices including, but not limited to Apple and Android devices. It is backwards compatible with USB 1.0, 1.1, 2.0, 3.0, and 3.1.

When the charger charges multiple devices:

USB-C Output: 5V/9V12V15V/20V @3A (Max 60w)

USB-A Output: 5V @ 2.4A, (Max 12w)

Be sure to use quality USB cables because the cable used will effect the speed of charging. We recommend the use of cables that are capable of 100W for maximum performance.

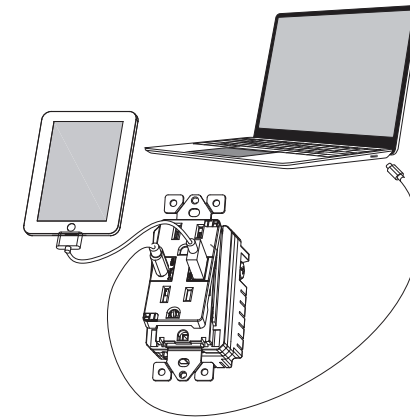

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.