


INSTALLATION INSTRUCTIONS

61501-TR2USB3-S

Dual USB Charger with
15A Duplex Tamper Resistant Receptacle



SPECIFICATIONS

Receptacle Rating.....	15 Amp, 125VAC
USB Rating.....	Two USB ports with total 3.1 Amp, 5VDC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
USB Compatibility.....	USB 1.1/2.0/3.0 devices, including Apple products
Receptacle Dimension	3-3/4"×2-1/4"×3-3/16"

DESCRIPTION

The 61501-TR2USB3-S is a duplex Tamper-Resistant Receptacle with two USB charging ports. This 61501-TR2USB3 can charge any current USB compatible device simultaneously including smart phones, tablets, e-readers, cameras and MP3 players. It is also capable of charging new devices that require higher current ratings.

FEATURES

- Two USB ports with a total high-current power of 3.1 Amp, 5VDC.
- Charges most USB compatible electrical devices directly without an adapter.
- 2011 NEC Code compliant Tamper-Resistant Shutters
- Replaces a standard duplex receptacle
- Back wire terminals are designed for quick and easy installation
- UL Listed

WARNING

Turn the POWER OFF at the circuit breaker before installing the receptacle.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.


Use copper wire only.

This USB receptacle CANNOT be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

WIRING DIRECTIONS

There are two ways to wire the receptacle:


1. Loop wire around terminal screws and firmly tighten terminal screw.
2. Insert wire(s) through terminal holes in the back, then tighten terminal screws. Use this method when attaching 2 wires to same terminal.
 - Connect HOT wire to the HOT terminal (brass screw).
 - Connect NEUTRAL wire to the NEUTRAL terminal (silver screw).
 - Connect GREEN or BARE wire to the GROUND terminal (green screw).

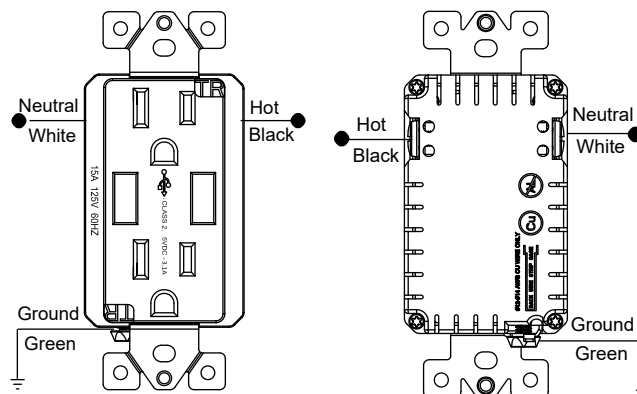

COMPATIBILITY

The 61501-TR2USB3-S USB Charger/Tamper-Resistant Receptacle is compatible with a wide range of electronic devices including, but not limited to, the following:

- iPhone®
- iPad®
- iPad® Mini
- iPod®
- Tablets
- Mobile Phones
- Bluetooth™ Headsets
- Digital Cameras
- Android
- Windows® Phone
- HTC
- Kindle™
- Nook e-reader
- GPS Devices
- Galaxy Tab™
- Other USB Compatible products
- Blackberry®

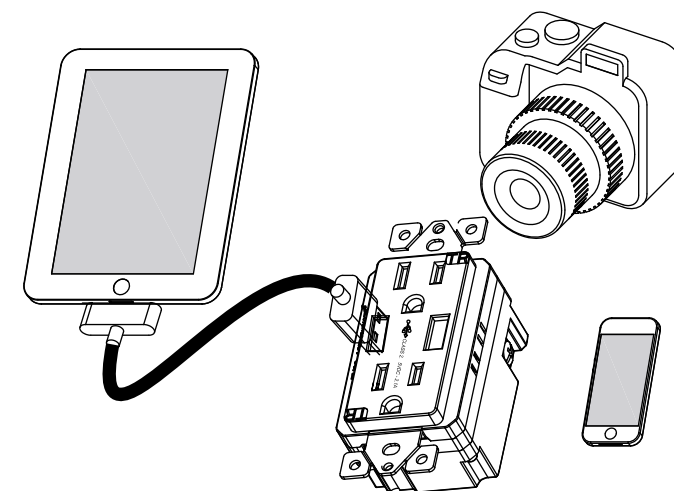

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.



© 2017 Enerlites Inc.
CA, U.S.A.
WWW.ENERLITES.COM
0208170096
REV 20230803