


INSTALLATION INSTRUCTIONS

61501-TRRP
Decorator Recessed Duplex
Receptacle and Wall Plate

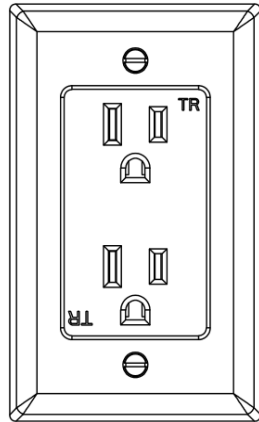

DESCRIPTION

15A temper resistant recessed receptacle is perfect for flat panel TV sets, hanging clocks or for any location needing an outlet with a flush surface when a device is plugged in. They are perfect for homes, apartments, co-ops, condominiums and offices.

SPECIFICATIONS

Receptacle Rating.....15 Amp, 125VAC
Wire Terminals.....#14-#12 AWG
Operating Temperature..... -4 to 140°F (-20 to 60°C)
Receptacle Dimension4.47" H x 2.71" W x 2" D

FEATURES

- They are perfect for homes, apartments, co-ops, condominiums and offices.
- 15A temper resistant recessed receptacle is perfect for flat panel TV sets, hanging clocks or for any location needing an outlet with a flush surface when a device is plugged in.
- They are perfect for homes, apartments, co-ops, condominiums and offices.
- They are perfect for homes, apartments, co-ops, condominiums and offices.
- They are perfect for homes, apartments, co-ops, condominiums and offices.

INSTALLATION

Turn the POWER OFF at the circuit breaker before installing the receptacle.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only..

WIRING DIRECTIONS: SIDE-WIRE

- Remove approximately 3/4" insulation from wire
- Loop wires clockwise 3/4 turn around terminal screws
- BLACK (LINE) wire to BRASS screw
- WHITE (NEUTRAL) wire to SILVER screw
- GREEN or BARE (GROUND) wire to GREEN screw
- Firmly tighten screws over wire loops.

WIRING DIRECTIONS: SIDE-WIRE

- Remove approximately 3/4" insulation from wire
- Loop wires clockwise 3/4 turn around terminal screws
- BLACK (LINE) wire to BRASS screw
- WHITE (NEUTRAL) wire to SILVER screw
- GREEN or BARE (GROUND) wire to GREEN screw
- Firmly tighten screws over wire loops.

WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.



© 2018 Enerlites Inc.
CA, U.S.A.
WWW.ENERLITES.COM
0206050118-01